


 steinel



HM 2600 E
STEINEL Corded Heat Tool

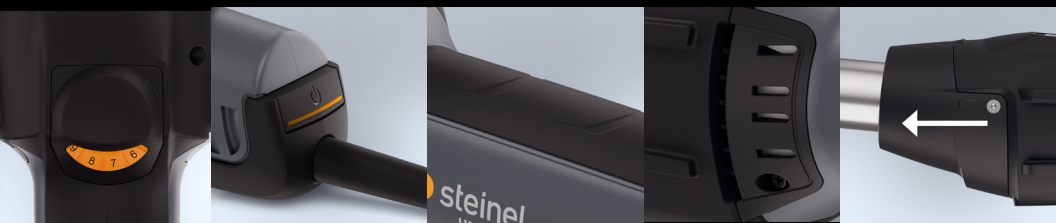

HM 2600 E



Technical Specifications

Power Supply: 120 V, 60 Hz
Output: 1750 watts
Airflow rate: 13 cfm (+/- 0.5 cfm)
Temperature: 120 - 1150 °F
Temperature settings: 9 stages
Thermal cutout: Yes

Product Numbers

HM 2600 E Tool with Restart
Protection:
110100434

HM 2600 E Tool without
Restart Protection:
110109232



Thumbs up for the thumbwheel



Features

Easy thumbwheel dial, plug-in heating element, ergonomic grip, fine dust filter, field changeable power cord, available with and without restart protection.

HM 2600 E Roofing Kit Includes:

- HM 2600 E heat tool
- Spare heating element
- Pressure roller Ø 45 mm
- Flat angled nozzle 40x2 mm
- Flat angled nozzle 20x2 mm, 100°
- Heavy duty carrying case

NO SCREEN
NO GLARE

THUMBWHEEL
CONTROL



HM 2600 E Roofing Kit:
110108756



HM 2600 E Decking Kit:
110112463

HM 2600 E Decking Kit Includes:

- HM 2600 E heat tool
- Pressure roller Ø 45 mm
- Flat angled nozzle 40x2 mm
- Flat angled nozzle 20x2 mm, straight
- Heavy duty carrying case

Steinel Tools North America
9051 Lyndale Ave. South
Bloomington, MN 55420

Support: (800) 852-4343
Email: sales@steinel.net

steineltools.net

● steinel

